


Range Rover Classic Hinged Rear Lamp Guards

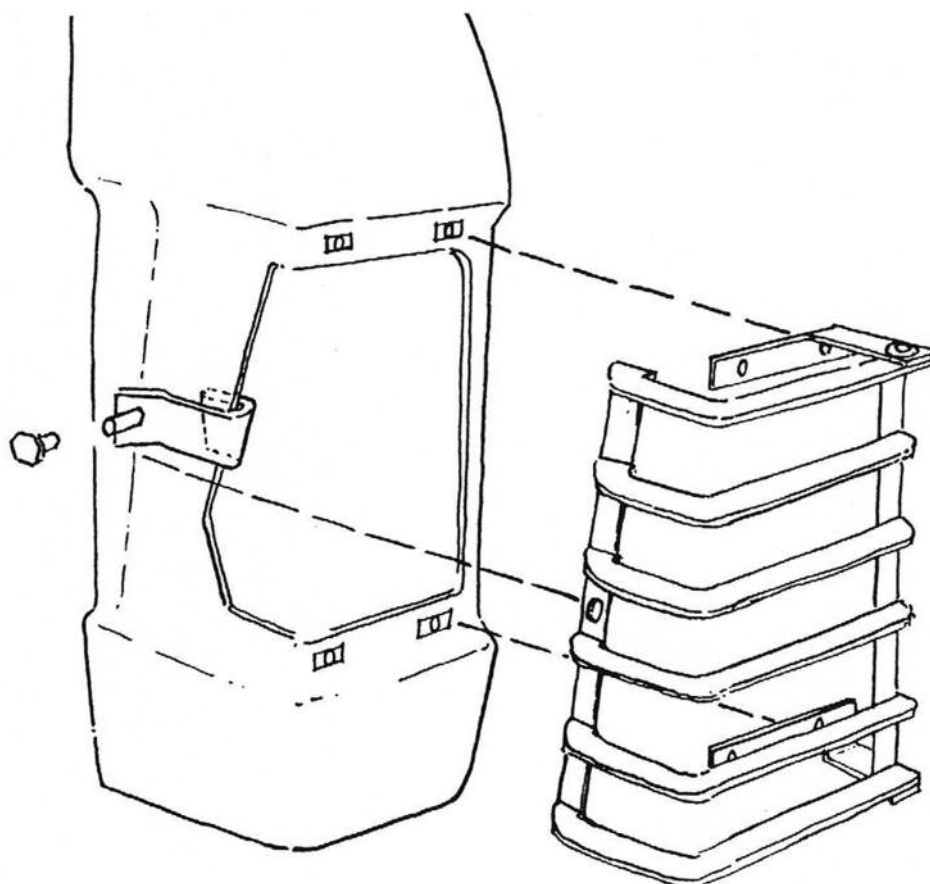

1. Remove lamp assembly, including gasket, from vehicle.
2. Position guard with welds on underside of slats.
3. Fix to body using existing self-tapping screws. (Do not remove hinge brackets from guard)
4. Clap side bracket in required position. (Do not over tighten M6 screw)
5. Remove self-tapping screws from hinge brackets and remove guard.
6. Replace lamp assembly, slide hinge bracket (attached to guard) between gasket and vehicle body and clamp in place using existing self-tapping screws.
7. Close guard over lamp and replace plastic knob.