

# FITTING INSTRUCTIONS

## > Discovery 3




**Dog Guard**

# **BRITPART**

The quality parts for Land Rovers

# Fitting Instructions

## Discovery 3 - Dog Guard

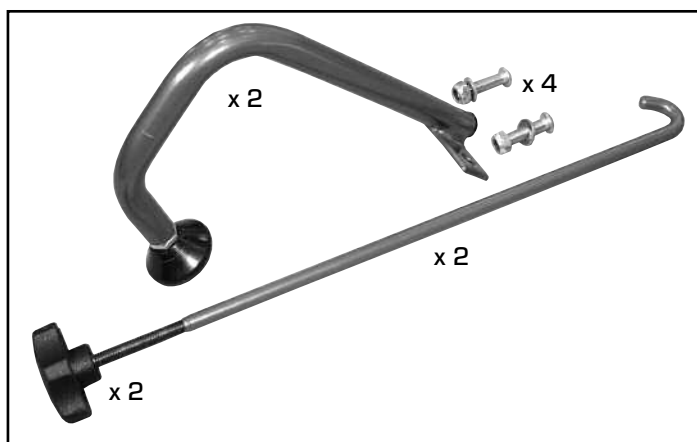

### Contents

- 1 x Dog guard
- 2 x Side Arms
- 2 x Rods
- 2 x Knob
- 4 x Bolts
- 4 x Nuts
- 4 x Washers

### Tools required

- 1 x 10mm spanner
- 1 x 4mm hex drive

(Fig 1)



(Fig 2)



(Fig 3)



(Fig 4)

1. Lower the rear and boot space seats.
2. Assemble side arms. (Fig 1)
3. Put guard into place with the side arm on the door pillar: (Fig 2)
4. Once in position, take the hook and put through the downward facing tube on dog guard, hook round the vehicle's lashing ring. Attach knob and tighten. Repeat for the other side. (Fig 3)
5. Put seats back up into their normal position. (Fig 4)
6. Replace rolling parcel shelf if applicable.

### WARNING

Accessories which are not properly fitted can be dangerous.  
Read the instructions carefully prior to fitting.  
Whilst fitting, comply with the instructions at all times.